



Lifeline Measurement Form

Need New Lifelines? JSI Makes It Easy!


Simply Choose One Of These 3 Options:

1. Purchase hand crimp parts & tools and do it yourself!
2. Fill out the Measurement Form below & fax, mail or email your order.
3. For perfect results, simply ship your old lifelines to: JSI Rigging Division - 2233 3rd. Ave. S., St. Petersburg, FL 33712

Please print your name, shipping address, phone and fax numbers and instructions on the bottom of this form.

LIFELINE MEASUREMENT FORM

LIFE LINE FITTINGS WITHOUT GATES:

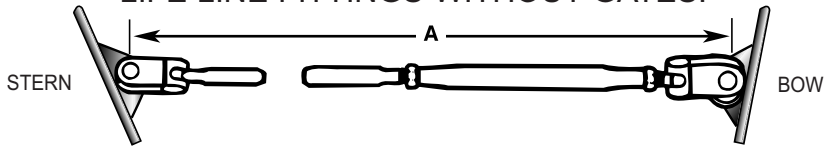


A = Distance from stern padeye to bow pulpit pad eye

- Note: 1. Measure both sides of boat for life line dimensions.
2. Do not measure with rope. USE TAPE MEASURE.

	Wire Diameter	Dimension A
STBD		
PORT		

LIFE LINE FITTINGS WITH GATES:

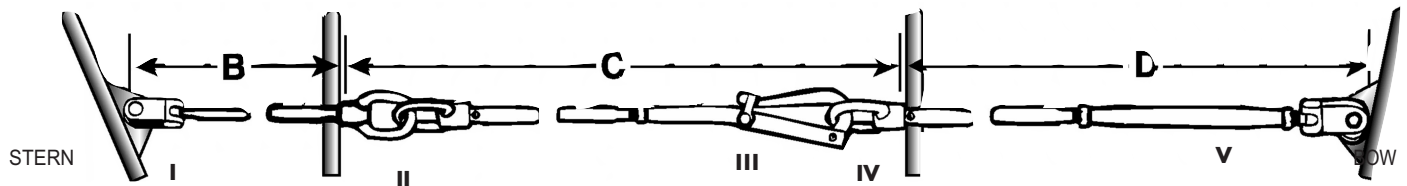

I - Toggle Jaw II - Interlocked Gate Eyes III - Pelican Hook IV - Single Gate Eye V - Turnbuckle

	Wire Dia.	Dim. B	Dim. C	Dim. D	Remarks
TOP	STBD				
	PORT				
BOT.	STBD				
	PORT				

TOP & BOTTOM LIFE LINE:

- B = Distance from stern rail padeye to forward side of stanchion.
- * C = Distance between stanchions, inside to inside.
- D = Distance from aft side of stanchion to bow pulpit padeye.
- * If bottom gates not wanted, indicate "none" under Dimension C.
- Note:** If top gates are not required on one side, use Dimension A.

Name: _____

Shipping Address: _____

City: _____ State: _____

Zip: _____

Phone: _____

Fax: _____

Instructions: _____